

 MULTImedia & NETworking	S.C. MultiNET S.R.L. Romania, Baia Mare, Bd. Unirii Nr.11 A/J, Cod: 430271 Tel. 0262-222201, Fax: 0262-220729 arpi@multinet.ro , www.videocapture.multinet.ro R.C.: J24 / 1183 / 1994, C.U.I.: RO 5783680		 Certificat Nr. 7006 ISO 9001	 Certificat Nr. 2365 ISO 14001
	26 Ani de Buna Practica in MULTImedia&NETworking			

USB-to-HDMI



High-Quality



Convertor USB-la-HDMI / DVI-D

Rezolutie tipica livrata la iesire: **1920 x 1080**

Intrare: USB

Iesire: HDMI (cu audio) sau DVI-D

Compatibil: PC & Mac & Linux







Windows: maxim 6 canale grafice / ecrane suplimentare


Macintosh: maxim 4 canale grafice / ecrane suplimentare

Domenii de utilizare:


- Small Office & Home Office
 - Supraveghere video
 - Comert
 - Publicitate
 - Invatamant
- Control & comanda in timp real
 - Imagistica medicala
 - CAD / CAM / CAE
 - Piata financiara
 - Desktop Publishing
 - etc.

 <p>Trimite prezentari, filme sau alte materiale digitale de pe laptop pe un monitor cu intrare HDMI / DVI</p>	 <p>Multiplica canalul grafic existent</p>
--	---

 IBM Advanced Business Partner 2020	 Lexmark Authorised Premium Partner 2020	 HP Silver Partner 2020	 Leading Innovation >>> Gold Partner Service&Sales 2020	 2020	 Digital Video Solutions Dealer Autorizat
--	---	--	---	--	--

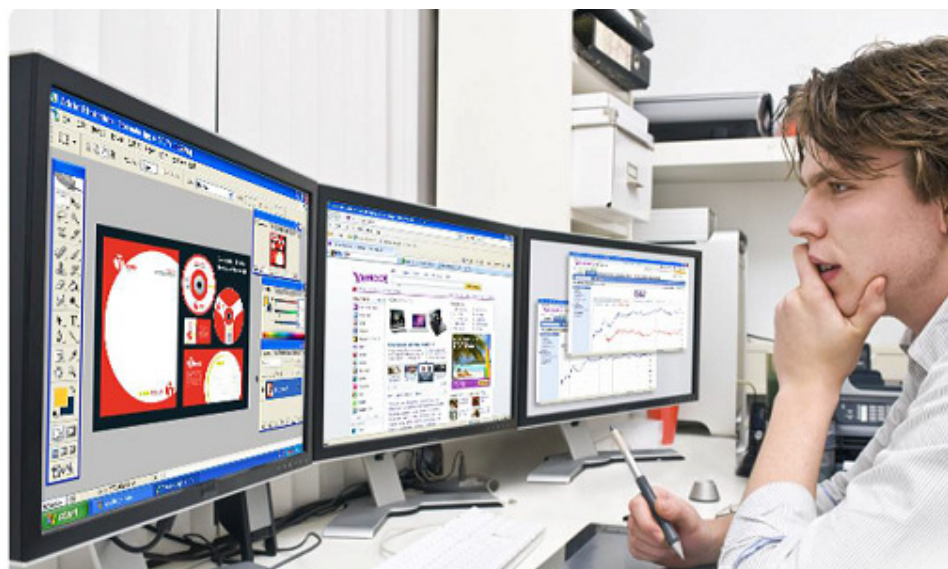

Afiseaza informatia provenita de la diferite aplicatii pe ecrane distincte

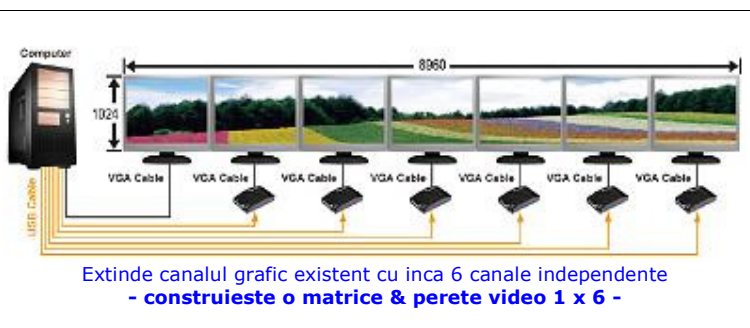

Specificatii

- Intrare: USB 2.0
- Iesire: HDMI 1.3, DVI 1.0
- Rezolutie maxima livrata: 2048x1152
- Sisteme de operare: Windows / Mac OS / Linux
- Audio Sampling Format: 16bit, 20bit, 24bit L-PCM 32KHz, 44.1KHz, 48KHz
- Temperatura operare: 0 – 45 °C
- Temperatura stocare: -20 – 60 °C
- Dimensiuni: 96x64x15mm
- Greutate: 20g

